

Rooster

Light your city, Light your mind

雄鷄企業股份有限公司
ROOSTER LIGHTING CO., LTD.

屏東科技產客園區 屏東縣屏東市大洲里園西街2號
Pingtung Science and Technology Industrial Zone
No. 2, Yuanshi St., Dajhou Village, Pingtung City 90093, Taiwan
TEL : +886-8-7521688 • FAX : +886-8-7520123
Facebook : www.facebook.com/RoosterLighting
Website : www.roosterlighting.com



QT 24

DOT LIGHT

RGB

IP65

DMX512


爆炸視圖

Explode View



產品規格 Product Specification


燈殼材質 Housing material	防火級ABS塑膠 Fire-rated ABS plastic
玻璃透光罩 Glass diffuser	玻璃材質製成·耐熱溫差達90C以上 Glass, heat-resistance temp. up to 90°C
輸入電壓 Input voltage	DC24V
功率因素 Power factor	搭配電源供應器可達95%以上 Up to 95% with power supply
燈串組成 Lighting set	每串20顆·單顆LED模組訊號獨立控制 20pcs per set. Each LED module can control independently
燈組間距 Light spacing	可選擇50cm / 100cm / 150cm / 200cm Selectable for 50cm, 100cm, 150cm and 200cm
總消耗功率 Power consumption	每串25W 25W per set
LED光源等級 LED	Cree / Nichia / Osram或同等級SMD 5050 RGB LED封裝 Cree/ Nichia/ Osram or same level SMD 5050 RGB LED
LED光源規格 Luminance	單顆輝度 $\geq 144\text{cd/m}^2$ $\geq 144\text{cd/m}^2$ per light
LED燈效 LED color	全彩 / 3000K / 6000K Full Color / 3000K / 6000K
光源壽命 LED lifetime	$\geq 50,000$ 小時 $\geq 50,000$ hours
防水等級 Protection level	燈具模組IP65以上 IP65
維護 Maintenance	光源模組化設計·燈具無須拆除或剪線即可直接更換 Modulized design. No need to remove the light or cut off cable to replace the LED light source
控制介面 Control system	支援DMX512系統 Supports DMX 512 system
工作溫度 Working temperature	-20~60°C
工作溼度 Working humidity	20~90% RH
燈具出線 Cable	整合式 I / O 快速接線組 / IP68 IP68 integrated I/O fast wiring set
線材規格 Cable specification	抗張力耐候單隔離電纜 High tensile strength weather proof cable

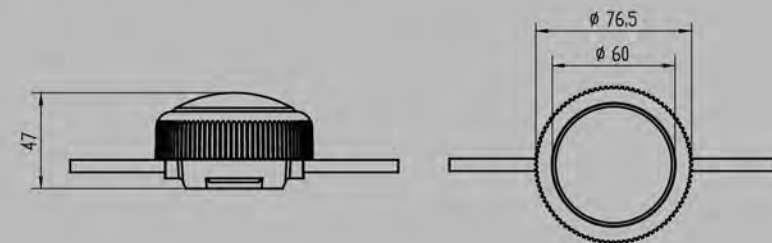

Unit : mm

安裝示意圖

Installation Diagram

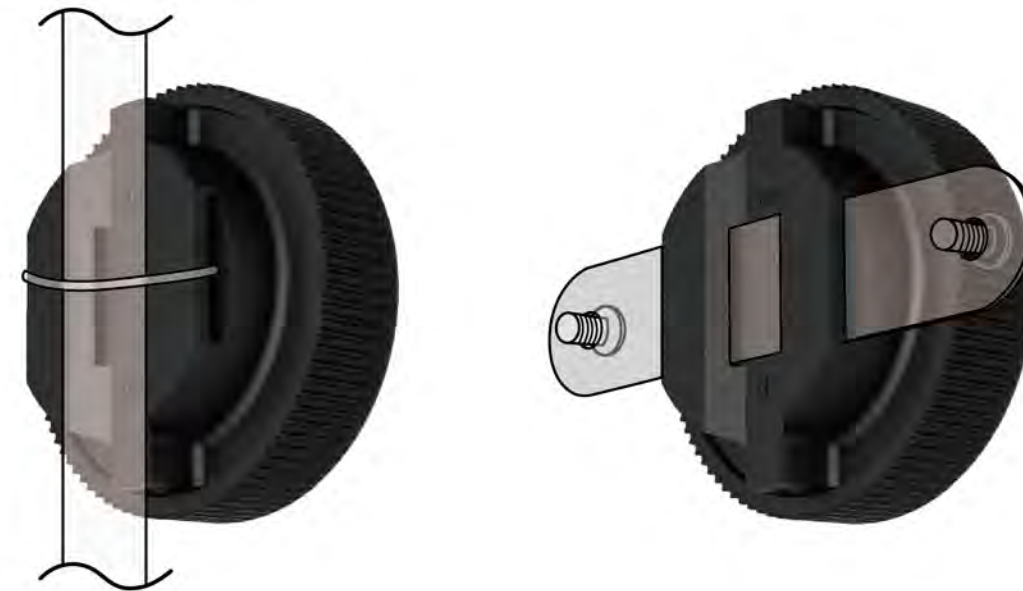

管式固定 Tube fixing

適用於 $\phi 48 \sim \phi 200$ 之鋼管或鋼索固定，配合金屬束帶讓安裝變得快速容易。

Suitable for steel pipe or cable fixing. Use with metal straps will make installation quick and easy.

壁面固定 Wall fixing

嵌入一特製五金固定件後，即可配合壁面之固定，安裝容易。

Embedding the mounting accessory to easily fix the light on the wall.

防水接頭 Waterproof connector

- 快速插拔型接頭
- 防水等級 IP68

- Quick plug-type connector
- IP68

